

# Smart-UPS On-Line 230 V

Unity output power factor single-phase, double-conversion online UPS with advanced management features



## A versatile UPS developed for unstable power conditions worldwide

Smart-UPS™ On-Line provides high-density, double-conversion, online power protection for servers, voice/data networks, medical labs, and light industrial applications. The Smart-UPS On-Line is capable of supporting loads from 5 kVA – 10 kVA in a rack/tower convertible chassis. The 6 kVA, 8 kVA, and 10 kVA models feature unity output power factor enabling them to support power-hungry blade servers or heavily loaded equipment racks. When business-critical systems require runtime in hours, not minutes, Smart-UPS On-Line can be configured with multiple battery packs to meet aggressive runtime demands.

The included PowerChute™ Network Shutdown management software provides unattended graceful shutdown of network operating systems. All models include an integrated network management card for remote management. The entire Smart-UPS On-Line family provides value to customers with demanding power conditions, including a very wide input voltage window, extremely tight output voltage regulation, frequency regulation, internal bypass, and input power factor correction.

# Smart-UPS On-Line

Industry leading power factor maximizing UPS density

Rackmount and Tower SRT 5 kVA – 10 kVA



[SRT6KXLI shown]

## Standard Features

### Best-in-class Power Density:

More real power in watts, 0.9 pf on 5 kVA, Unity on 6 kVA – 10 kVA units

### High-efficiency “Green Mode”:

Achieves 98% efficiency which saves utility and cooling costs without compromising performance or reliability

### Graphical LCD Display with Multicolor Backlight:

Intuitive interface provides detailed and accurate information with ability to configure locally

### Intelligent Battery Management:

Temperature-compensated charging extends life and advanced algorithms recommend replacement date. The UPS can inform user which batteries need to be replaced and auto detect when additional battery packs are added

### Built-in Energy Meter:

Measures energy use and displays UPS efficiency in various modes of operation for easy energy tracking

### Operate without Battery:

Ability to immediately protect equipment when power returns


### Three-year Warranty on Electronics:

Additional year of warranty protection for electronics provides peace of mind

# Smart-UPS On-Line

Proven performance with the world's largest installed base of single-phase, double-conversion products

Rackmount and Tower SRT 5 kVA – 10 kVA

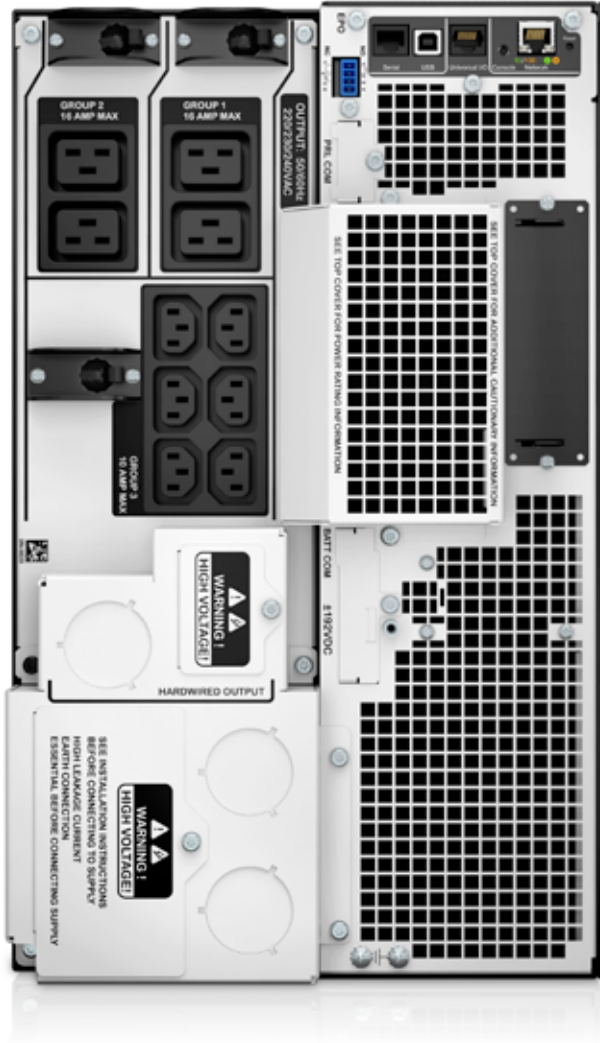

[ SRT10KXLI shown ]

## Additional Features

### Embedded Network Management Card with Environmental Monitoring

Remote monitoring and control of the UPS and the environment via Ethernet connection while freeing up the ONE LINE as SmartSlot™ so customers can add accessories for additional communication options

### Switched Outlet Group(s)

Ability to control a group of output load receptacles independent from the main UPS. Enables:

- Rebooting hung device without cycling the entire UPS
- Sequenced turn ON/OFF
- Shedding of non-critical loads based on a variety of parameters (on battery time, runtime remaining, and overload)
- Scheduled time OFF to conserve energy

### Emergency Input Power Off (EPO)

Remote UPS shutoff in the event of a fire or other emergency. The UPS can accept normally open (NO) or normally closed (NC) contacts

### Communication Ports

Serial, USB, Ethernet, and SmartSlot for network accessory cards

### Communication Protocols

Modbus Serial, USB Power Summary, HTTP, SNMP, and Telnet

### 1:1, 3:1 Input Hard-wire Options

Product can be wired for 3-PH or 1-PH input (230 V, 8 kVA, and 10 kVA models only)

### Dual Input

Enables second input source to be connected to UPS bypass (230 V, 8 kVA, and 10 kVA models only)

# Smart-UPS Display On-Line

Intuitive, easy-to-use LCD provides clear and accurate information in multiple languages

## Standard Features

### LCD Display Screen

Accurately provides real-time status updates in your choice of basic or advanced menus

### UPS Status (Scrolling):

- Output voltage
- Input voltage
- Output frequency
- Runtime
- Load
- Battery health

### Control:

- UPS and outlet group settings
- Bypass control

### Configuration:

- Output voltage, frequency
- Language, brightness, contrast
- Alarm volume
- IP address

### Test and Diagnostics:

- Initiate battery and runtime calibration tests

### About:

- UPS serial number, battery part number
- Battery install and suggested replacement dates



### Backlight screens:

Yellow: Indication of condition that requires attention

Red: Indication of UPS alarm that requires immediate attention



# Product Accessories

## Management Cards

**AP9630:** UPS Network Management Card with PowerChute Network Shutdown

**AP9631:** UPS Network Management Card with PowerChute Network Shutdown & Environmental Monitoring

**AP9335TH:** APC™ Temperature & Humidity Sensor

**AP9810:** APC Dry Contact I/O Accessory

**AP9624:** UPS Interface Expander

## Battery Packs

**SRT192BP:** APC Smart-UPS SRT 192 V, 5 kVA, and 6 kVA Battery Pack

**SRT192RMBP:** APC Smart-UPS SRT 192 V, 5 kVA, and 6 kVA RM Battery Pack

**SRT192BP2:** APC Smart-UPS SRT 192 V, 8 kVA, and 10 kVA Battery Pack

**SRT192RMBP2:** APC Smart-UPS SRT 192 V, 8 kVA, and 10 kVA RM Battery Pack

**SRT002:** APC Smart-UPS SRT 15 ft. Extension Cable for 192 VDC External Battery Packs 5/6 kVA UPS

**SRT003:** APC Smart-UPS SRT 15 ft. Extension Cable for 192 VDC External Battery Packs 8/10 kVA UPS

## Rail Kits

**SRTRK2:** APC Smart-UPS SRT 19 in. Rail Kit for Smart-UPS SRT 5/6/8/10 kVA

**AP9625:** APC Two-Post Mounting Kit for Smart-UPS and Symmetra

## Backplate Kit

**SRT001:** APC Smart-UPS SRT 5 kVA Output HW Kit

## Transformers

**SURT002:** APC Smart-UPS RT 5,000 VA 230 V Isolation Transformer

**APTF10KW01:** APC WW 10 KVA Isolation Transformer

## Service Bypass Panels

**SBP6KRM12U:** APC Service Bypass Panel 230 V; 50 A; MBB; Hardwire input; (4) IEC®-320 C19 Output

**SBP10KRM14U:** APC Service Bypass Panel 230 V; 100 A; MBB; Hardwire input; IEC-320 output (8) C13 (2) C19

## Other

**SURT013:** SURT Equipment Cart

## Replacement Battery Cartridge

**APCRBC140**



AP9631: Management Card



Battery Pack



Rail Kits

## Runtime Estimates at Half and Full Load (Minutes)

UPS Half/Full Loads	SRT5K (2,250 W/4,500 W)	SRT6K (3,000 W/6,000 W)	SRT8KXLI (4,000 W/8,000 W)	SSRT10K (5,000 W/10,000 W)
Internal	11.8/4	8.7/2.5	14.54/5.24	11.5/3.8
(1) Battery pack	46.2/20.5	36/15.5	34.50/14.71	28/11.6
(2) Battery packs	83/38	65.2/29.4	55.43/24.63	45.3/19.8
(3) Battery packs	121/56.4	95.5/43.8	77.0/34.84	63.1/28.2
(4) Battery packs	160.4/75.1	126.6/58.6	99.07/45.33	81.3/36.8

# Smart-UPS On-Line SRT 5 kVA – 10 kVA

## Technical Specifications

Product feature	SRT5KXLI SRT5KRMXLI	SRT6KXLI SRT6KRMXLI	SRT8KXLI SRT8KRMXLI	SRT10KXLI SRT10KRMXLI
<b>Output</b>				
Power rating	5,000 VA/4,500 W	6,000 VA/6,000 W	8,000 VA/8,000 W	10,000 VA/10,000 W
Nominal output voltage	230 V (220 V, 240 V user selectable)			
Output frequency	50/60 Hz ± 3 Hz (auto sense)		50/60 Hz ± 0.1 Hz (user selectable)	
Topology	Double-conversion Online			
Online Efficiency at Full Load (typical)	94%			
Green Mode Efficiency at Full Load (typical)	98%			
Output Connections (Switched groups)	(6) IEC 320 C13 (4) IEC 320 C19	(6) IEC 320 C13, (4) IEC 320 C19, HW 3-Wire (L+N+G)		
<b>Input</b>				
Nominal input voltage	230 V (220 V, 240 V user selectable)			
Input voltage range full load (half load)	160 – 275 V (100 – 275 V)			
Input frequency	40 – 70 Hz auto-selecting			
Input connection	Hardwire three-wire (1 Ph+N+G)		Hardwire three-wire (1 Ph+N+G), Hardwire five-wire (3 Ph+N+G)	
<b>Batteries and runtime</b>				
Battery type	Maintenance-free sealed lead-acid battery with suspended electrolyte, leak proof			
Typical Backup Time at 1/2 Load (min.)	11.8 min.	8.7 min.	14.8 min.	11.5 min.
Typical Backup Time at Full Load (min.)	4 min.	2.5 min.	5.3 min.	3.8 min.
Replacement Battery (Quantity)	APCRBC140 (1)		APCRBC140 (2)	
External Battery Pack (Tower/Rack Mount)	SRT192BP/SRT192RMBP		SRT192BP2/SRT192RMBP2	
<b>Communication and management</b>				
Interface Ports	RJ-45 with Status LEDs (10/100 Base-T), Serial (RJ45), USB (Type B) and SmartSlot			
Control panel	High Resolution Graphical LCD display			
Emergency power off (EPO)	Yes (NO/NC connections)			
Embedded Network Management with Environmental Monitoring	Yes			
<b>Physical</b>				
Rack height	3 U	4 U	6 U	6 U
Maximum height (RM)	130 mm	174 mm	263 mm	263 mm
Maximum width (RM)	432 mm	432 mm	432 mm	432 mm
Maximum depth (RM)	719 mm	719 mm	715 mm	715 mm
Net weight	54.5 kg	60 kg	112 kg	112 kg
<b>Conformance</b>				
Regulatory	CE, VDE, C-tick, EAC, EN 50091-1, EN 50091-2, IEC 62040-2 2005 Edition, IEC 60950			
Warranty	Three years for electronics/two years for battery			